HP

HP P32u G5 80 cm (31.5") 2560 x 1440 pixels Quad HD Black

Brand : HP

Product code: 64W51AA

Product name : P32u G5

P32u G5 QHD USB-C Monitor

HP P32u G5 80 cm (31.5") 2560 x 1440 pixels Quad HD Black:
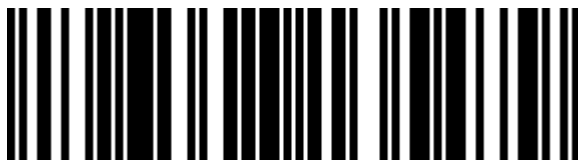
Powerful Productivity
Accelerate your productivity with this massive, 31.5-inch diagonal monitor. Experience the stunning views via QHD and 99 % sRGB and the power of USB-C® connectivity. Along with the modern and functional design, it's never been easier to get more done.
HP P32u G5. Display diagonal: 80 cm (31.5"), Display resolution: 2560 x 1440 pixels, HD type: Quad HD, Response time: 5 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in speaker(s). VESA mounting. Product colour: Black

IPS   XXX°

Display

Display diagonal *	80 cm (31.5")
Display resolution *	2560 x 1440 pixels
HD type *	Quad HD
Native aspect ratio *	16:9
Panel type *	IPS
Backlight type	Edge LED
Touchscreen *	✘
Display brightness (typical)	350 cd/m²
Response time	5 ms
Anti-glare screen	✔
Screen shape *	Flat
Supported graphics resolutions	640 x 480 (VGA), 720 x 400, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 800 (WXGA), 1400 x 900, 1600 x 900, 1680 x 1050 (WSXGA+), 1920 x 1080 (HD 1080), 1920 x 1200 (WUXGA), 2560 x 1440
Aspect ratio	16:9
Contrast ratio (typical) *	1000:1
Contrast ratio (dynamic)	8000000:1
Maximum refresh rate *	60 Hz
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours *	16.7 million colours
Pixel pitch	0.27 x 0.27 mm
Pixel density	93 ppi
Digital horizontal frequency	30 - 120 kHz
Digital vertical frequency	48 - 75 Hz
Display diagonal (metric)	80 cm
Surface hardness	3H
Colour depth	8 bit
RGB colour space	sRGB
Colour gamut	99%
sRGB coverage (typical)	99%

Design

Certification	Argentina S-Mark; Australia MEPS; CB; CE; CECP; CEL; CEL Grade 1; China CCC; cTUVus; EAC; ENERGY STAR®; ErP; EUP Lot-6; FCC; ICES; ISO 9241-307; KC (Korean) requirements; KCC (Korean) requirements; Korea e-standby; Microsoft WHQL Certification; NOM (Mexico); PSB for Singapore; RCM; RoHS; SEPA; Taiwan BSMI; TCO Certified; TCO Certified Edge; TUV Bauart; VCCI; Vietnam MEPS; ISC; Low blue light; EUP Lot-26; EU RoHS; Ukraine Energy label; California Energy Commission (CEC); South Africa Energy; Mexico Energy; WW application; Ukraine certificates; NRCS of South Africa; TÜV Flicker free certified; India BIS

Ports & interfaces

Built-in USB hub *	✘
USB Type-C DisplayPort Alternate Mode	✔
USB Power Delivery	✔
HDMI *	✔
HDMI ports quantity	1
HDMI version	1.4
DisplayPorts quantity	1
DisplayPort version	1.2
Headphone out *	✘
HDCP	✔

Ergonomics

VESA mounting *	✔
Panel mounting interface	100 x 100 mm
Cable lock slot *	✔
Height adjustment *	✘
Tilt angle range	-5 - 20°

Performance

NVIDIA G-SYNC *	✘
AMD FreeSync *	✘
Low Blue Light technology	✔
HP segment	Business

Multimedia

Built-in speaker(s) *	✔
Built-in camera *	✘
Number of speakers	2

Design

Market positioning *	Business
Product colour *	Black
Country of origin	China

Ergonomics

On Screen Display (OSD)	✔
Tilt adjustment	✔

Power

Power consumption (typical) *	35 W
Power consumption (standby) *	0.5 W
Power consumption (max)	160 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

Operational conditions

Operating temperature (T-T)	5 - 35 °C
Operating relative humidity (H-H)	5 - 95%

Weight & dimensions

Width (with stand)	714.4 mm
Depth (with stand)	225.3 mm
Height (with stand)	569.7 mm
Weight (with stand)	8.29 kg
Width (without stand)	71.4 cm
Depth (without stand)	54 cm
Height (without stand)	42.4 cm

Packaging data

Package width	714.4 mm
Package depth	225.3 mm
Package height	569.7 mm
Package weight	11.7 kg

Sustainability

Sustainable technologies and materials	Outside box and corrugated cushions are 100% sustainably sourced and recyclable; 85% ITE-derived closed loop plastic; Low Halogen

Other features

Weight	8.29 kg
Height	424 mm
Width	714.4 mm
Depth	54 mm

0196548135479

196548135479
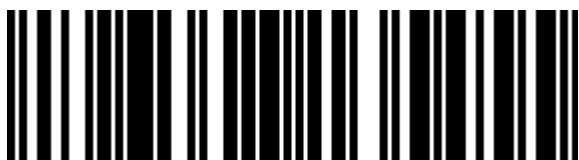
0196548135455

196548135455
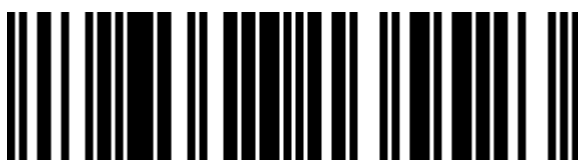
0196548135523

196548135523
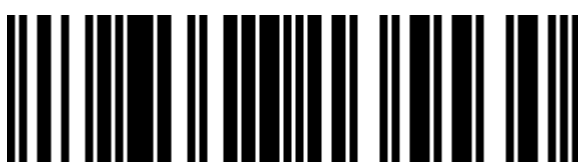
0196548135530

196548135530
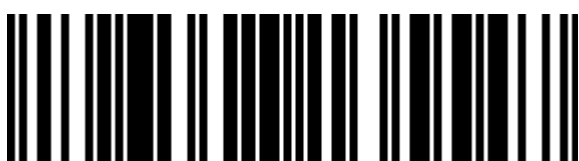
0196548135547

196548135547
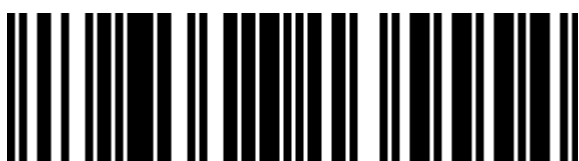
0196548135554

196548135554
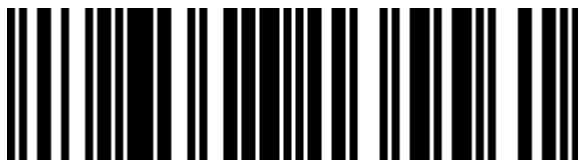
0196548135561

196548135561

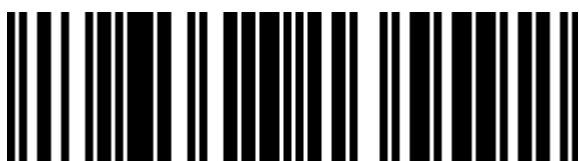0196548688357

196548688357
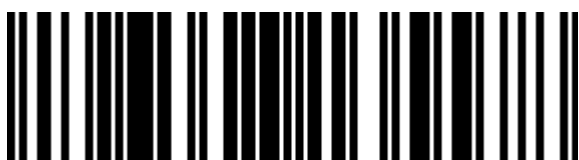
0196548135578

196548135578
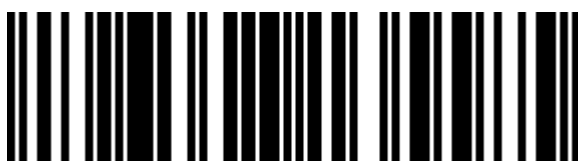
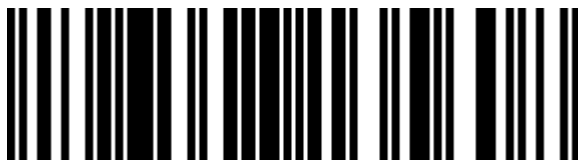0196548135585

196548135585

0196548135592
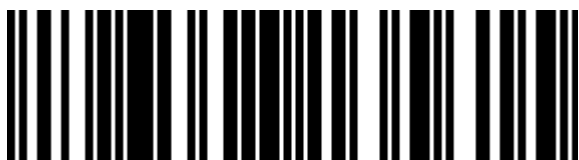
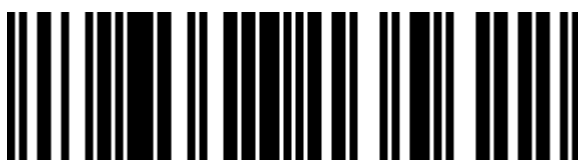196548135592

0196548688364

196548688364

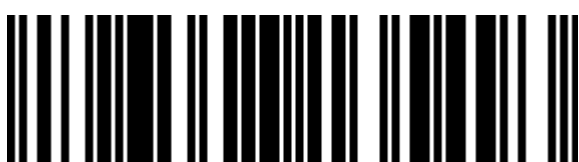0196548135608

196548135608

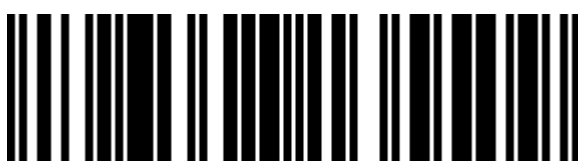0196548135615
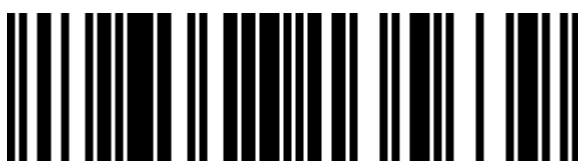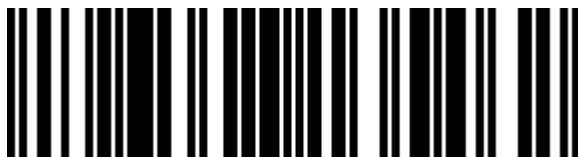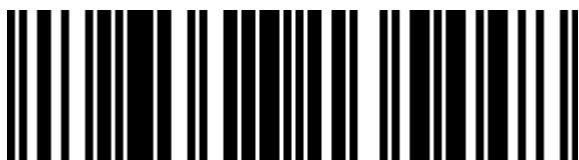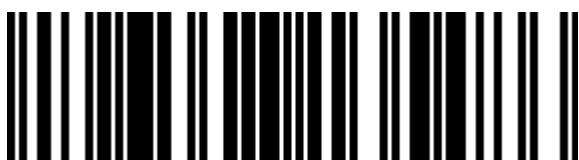
196548135615

0196548135622

196548135622

0196548135493

196548135493

0196548135509

196548135509

0196548135639

196548135639

0196548135462

196548135462

0196548135448

196548135448

0196548135486

196548135486

4573595770703