

# KSG8P4X



|                      |                                       |
|----------------------|---------------------------------------|
| Product family       | Hood                                  |
| Hood Type            | Canopy Cooker Hoods                   |
| Design               | Fully integrated                      |
| Extraction           | Ducted out or re-circulation possible |
| Electronic control   | Yes                                   |
| Perimeter extraction | Yes                                   |
| Material             | Stainless steel                       |
| Type of steel        | Brushed                               |
| EAN code             | 8017709319373                         |
| Aesthetics           | Universal                             |
| Colour               | Stainless steel                       |
| Finishing            | Brushed                               |
| Logo                 | Silk screen                           |



## Controls

|                 |                                     |            |       |
|-----------------|-------------------------------------|------------|-------|
| Control setting | Touch control back-lighted<br>White | Led colour | White |
|-----------------|-------------------------------------|------------|-------|

## Program / Functions

|                         |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|
| No. of speeds           | 3                                                                                   |
| Intensive speed         |  |
| 24h air filter function |  |
| Time-setting options    |  |
| Auto-Vent 2.0           |  |

## Technical Features



|                                |                  |                                    |           |
|--------------------------------|------------------|------------------------------------|-----------|
| No. of lights                  | 2                | No. of filters                     | 2         |
| Light type                     | LED              | Anti-grease filters                | Aluminium |
| Light power                    | 2,3 W            | Filter replacement indicator       | Yes       |
| Dimmer mode                    | Yes              | Vent outlet                        | 150 mm    |
| Light colour temperature range | 2700° - 4000° °K | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity   | 730 m³/h         | Minimum distance from ELECTRIC hob | 650 mm    |
| Motor power                    | 230 W            | Non return valve                   | Yes       |

|                    | Extraction rate IEC<br>61591 [m³/h] | Noise level IEC 60704-<br>2-13 [dBA] |
|--------------------|-------------------------------------|--------------------------------------|
| Speed 1            | 266                                 | 46                                   |
| Speed 2            | 356                                 | 52                                   |
| Speed 3            | 480                                 | 60                                   |
| Intensive<br>speed | 681                                 | 67                                   |

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 53 kWh/year

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 29,7

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 38,0 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 73,8 %

Grease Filtering Efficiency Class (GFEC) D

Air flow at minumum speed (Qmin) 266 m³/h

Maximum extraction rate 480 m³/h

Intensive extraction rate 681 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dBA

Airborne acouistical A-weighted sound Power Emission at maximum speed (SPEmax) 60 dBA

Airbourne acouistical A-weighted sound power emission at boost speed (SPEboost) 67 dBA

Time increase factor (F) 0,9

Energy Efficiency Index per first cavity 52,5

Measured air flow rate at best efficiency point (Qbep) 356 m³/h

Measured air pressure at best efficiency point (Qbep) 448 Pa

Measured electric power input at best efficiency point (Wbep) 149 W

Normal Power of the light system (WI) 5 W


Average illumination of the light on the cooking surface (Emiddle) 175 lux

Sound power level at highest setting (Lwa) 60 dBA

## Electrical Connection

Nominal power 235 W  
Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
Power supply cable length 1500 mm

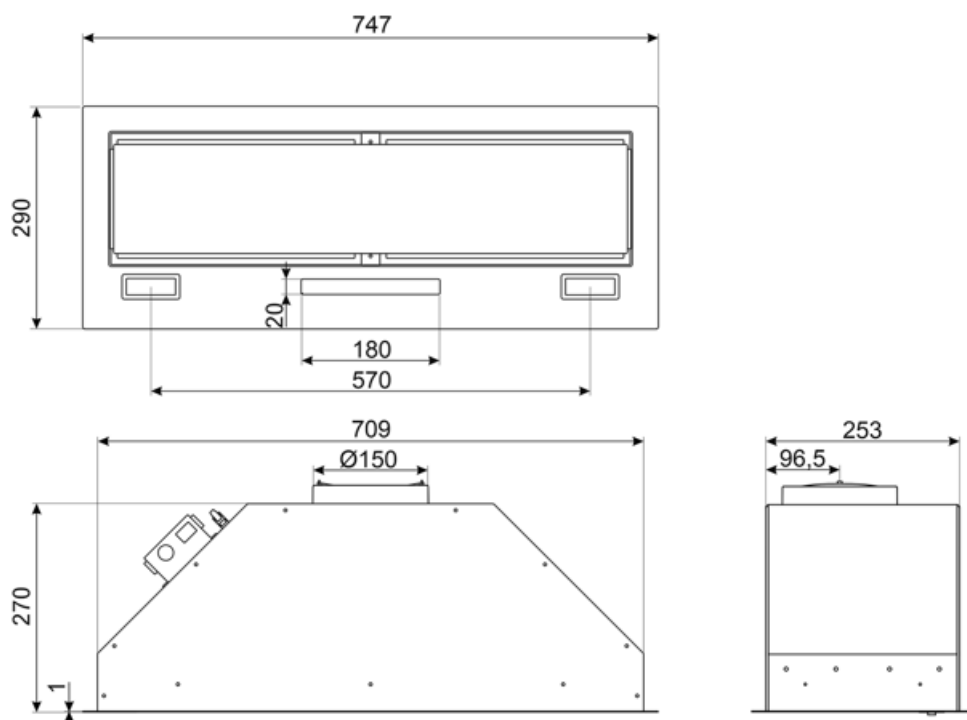

---

## Compatible Accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

|                                                                                  |                                                                                                                                                           |                                                                                   |                                                                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.                            |
|  | A: Product drying performance, measured from A+++ to D / G depending on the product family                                                                |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing.                                                                                                   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Perimeter extraction panels: very efficient and aid noise reduction.                                                                                      |  | Intensive/turbo setting: when extra fast extraction is required.                                                                   |
|  | Connection between hob and hood                                                                                                                           |  | ...                                                                                                                                |
|  | ...                                                                                                                                                       |                                                                                   |                                                                                                                                    |