

KBT9L4VN

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709305734
Aesthetics	Universal
Colour	Stainless Steel and Glass
Finishing	Brushed
Glass Type	Black
Serigraphy colour	Black
Logo	Silk screen



Controls



Control setting	Touch control back-lighted	Display	Yes
Led colour	White		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features



No. of lights	1	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	7,3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature range	3000° - 5700° °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	730 m³/h		

Motor power	230 W	Minimum distance from ELECTRIC hob	500 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	252	48
Speed 2	341	55
Speed 3	453	62
Intensive speed	705	72

Accessories Included

Tube reduction	Yes
----------------	-----

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 58 kWh/year

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 30,5

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 28,2 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 73,7 %

Grease Filtering Efficiency Class (GFEC) D

Air flow at mininum speed (Qmin) 252 m³/h

Maximum extraction rate 453 m³/h

Intensive extraction rate 705 m³/h

Airbourne acooustical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dBA

Airborne acooustical A-weighted sound Power Emission at maximum speed (SPEmax) 62 dBA

Airbourne acooustical A-weighted sound power emission at boost speed (SPEboost) 71 dBA

Time increase factor (F) 0,9

Energy Efficiency Index per first cavity 54,0

Measured air flow rate at best efficiency point (Qbep) 385 m³/h

Measured air pressure at best efficiency point (Qbep) 461 Pa

Measured electric power input at best efficiency point (Wbep) 161 W


Normal Power of the light system (WI) 7 W

Average illumination of the light on the cooking surface (Emiddle) 209 lux

Sound power level at highest setting (Lwa) 62 dBA

Electrical Connection

Nominal power	238 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

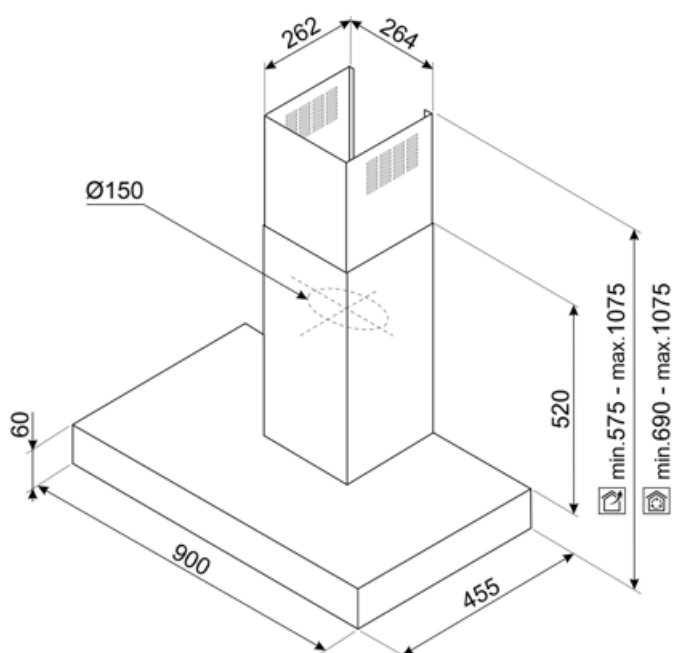


Compatible Accessories




KITCEKBT

Chimney extension, dimensions 261,5 * 260 * 830 mm suitable for T-shape hood KBT* & KBCT*, max height 1380 mm Stainless Steel



KITFCKBT

1 pcs of activated carbon filter for hood models KBT* / KBCT*



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	LED display: to show programmes, functions and options selected and the time to the end of the cycle.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.
	Connection between hob and hood		...
	...		