

## KWTUS 7054 F

Built-under wine conditioning unit

with FlexiFrame, ActiveHumidity and NoteBoard in a compact design.



- Storage of all bottle sizes/shapes thanks to FlexiFrame
- Perfect regulation of humidity with ActiveHumidity
- Writing on the wooden shelves on the NoteBoard
- UV-resistant insulated glass perfectly protects your wine
- Presented in perfect light – LED lighting

EAN: 4002516779346 / Material number: 12519490 /  
Old Material Number: 39705410EU1

<b>Appliance category</b>	
Wine conditioning unit	•
<b>Construction type</b>	
Built-in appliance	•
Integrated appliance	•
Undercounter appliance	•
Door hinge	right
Convertible door hinging	•
Side-by-side enabled	•
<b>Design</b>	
Casing colour	black
Front colour	Obsidian Black glass
Wine compartment lighting	continuously dimmable LED
<b>User convenience</b>	
Networking with Miele@home	•
Door opening aid	FrontOpen
Active AirClean filter	•
DynaCool	•
ActiveHumidity	•
Total number of shelves	4
Number of shelves	4
Shelf material	Beechwood
Number of FlexiFrame racks	3
Number of shelves for crosswise storage	1
SelfClose FlexiFrame	•
NoteBoard	Yes
Low-vibration storage	•
<b>Control system</b>	
Operating concept	FreshTouch
Independent temperature regulation of fridge and freezer zones	No
No. of temperature zones	1
Min. temperature setting range in °C	5
Max. temperature setting range in °C	20
Sabbath mode	•
<b>Fridge/Fridge section</b>	
Dry back wall	grey
<b>Efficiency and sustainability</b>	
Energy efficiency class (A–G)	F
Annual energy consumption in kWh	106,20
Energy consumption in 24 h in kWh	0,29
<b>Safety</b>	
Lock function	•
Acoustic door alarm	•
Acoustic temperature alarm	•
Optical door alarm	•
Optical temperature alarm	•

## KWTUS 7054 F

Built-under wine conditioning unit  
with FlexiFrame, ActiveHumidity and NoteBoard in a compact design.




EAN: 4002516779346 / Material number: 12519490 /  
Old Material Number: 39705410EU1


Technical data	
Niche width in mm min.	600
Niche width in mm max.	604
Niche height in mm min.	820
Niche height in mm max.	880
Niche depth in mm	580
Appliance width in mm	597
Appliance height in mm	819
Appliance depth in mm	579
Weight in kg	43,0
Climate range	SN-ST
Refrigerator compartment in l	111
Total usable capacity in l	110
0.75 l Bordeaux bottle capacity (no. of bottles)	44 bottles
Acoustic airborne noise emission class (A–D)	C
Sound emissions in dB(A) re 1 pW	36
Current consumption (mA)	1500
Voltage in V	220-240
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50-60
Length of supply lead in m	2,2
Accessories included	
White chalk pen	•

## KWTUS 7054 F


Built-under wine conditioning unit with FlexiFrame, ActiveHumidity and NoteBoard in a compact design.

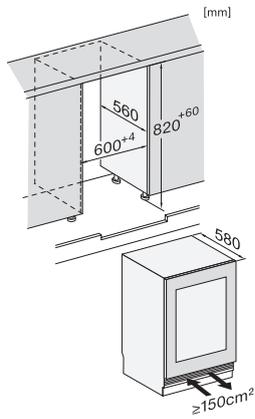


KWTUS7054F, KWTUS7055F, KWTUS7074F, KWTUS7096E, Built-under, installation diagram, niche dimensions

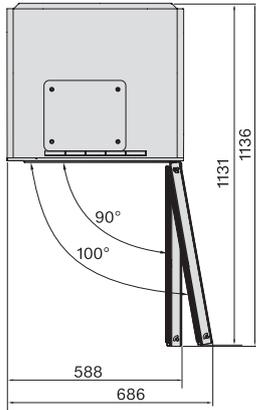

KWTUS7054F, KWTUS7055F, KWTUS7074F, Built-under, top view

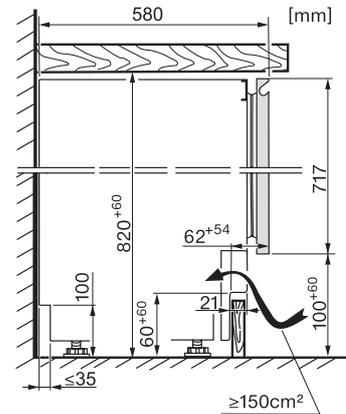


KWTUS7054F, KWTUS7055F, KWTUS7074F, Built-under, side view

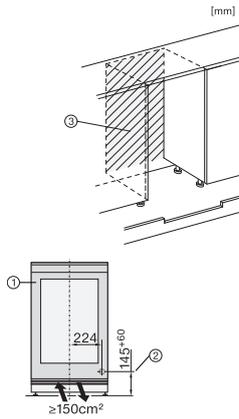

KWTUS7054F, KWTUS7055F, KWTUS7074F, KWTUS7096E, KWTUS7196E, Built-under, side view

1. View from the front, 2. Mains connection cable, L = 2200 mm, 3. No connection in this area

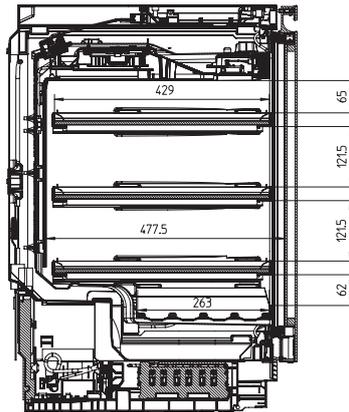

KWTUS7054F, interior dimensions