

**Series 4, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, flat hinge
KIV87SFE0**



Optional accessories

KSZB6R00 Bottle Rack

The spacious built-in fridge-freezer combination with VitaFresh XXL keeps food fresh for longer.

- **Cool Airflow:** optimal air circulation and even temperature level in the cooling area.
- **Keep your groceries in perfect view.**
- **Low Frost:** defrost less often thanks to lower ice formation.
- **Safety glass shelves:** safe storage thanks to particularly stable and shatterproof shelves.
- **Made in Germany:** high quality standards and thorough testing for enduring satisfaction.

Technical Data

Energy Efficiency Class (Regulation (EU) 2017/1369):	 E
Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369:	216 kWh/annum
Sum of volume of frozen compartments (EU 2017/1369):	 70 l
Sum of volume of chill- and unfrozen compartments (EU 2017/1369):	 200 l
Airborne acoustical noise emissions (EU 2017/1369):	..35 dB(A) re 1 pW
Airborne acoustical noise emission class (EU 2017/1369):	 B
Built-in / Free-standing:	 Built-in
Number of compressors:	 1
Number of independent cooling systems:	 1
Width of the appliance:	 541 mm
Height:	 1772 mm
Depth of the product:	 548 mm
Net weight:	 54.2 kg
Required niche size for installation (HxWxD):	 1775x560x550 mm
Door panel options:	 Not possible
Door hinge:	 Right reversible
Number of Adjustable Shelves in fridge compartment:	 4
Shelves for Bottles:	 Yes
Interior ventilator:	 No
Reversible Door Hinge:	 Yes
Length electrical supply cord:	 230 cm
Noise level:	 35 dB(A) re 1 pW
Multi-Flow Air Tower:	 No
Fast cooling switch:	 Yes
:	 Yes
Temperature Controlled Drawer:	 No
Humidity Control Drawer:	 No
Number of Door Bins - Refrigerator:	 4
Door bin adjustability - Refrigerator:	 Yes
Tilt-out door bins in fridge:	 Yes
Gallon Storage:	 Yes
Number of Gallon storage:	 1
Motorized Shelf:	 No
Material of the shelves:	 Safety glass
Door opened indicator freezer:	 No
Automatic motor-driven ice-maker:	 No
Fuse protection:	 10 A
Voltage:	 220-240 V
Frequency:	 50 Hz
Storage Period in Event of Power Failure (h):	 12 h
Door panel options:	 Not possible
Noise level:	 35 dB(A) re 1 pW
Energy Star Qualified:	 No
Dimensions of the packed product:	 72.45 x 24.01 x 25.19
Net weight:	 119.000 lbs
Gross weight:	 129.000 lbs



**Series 4, built-in fridge-freezer with
freezer at bottom, 177.2 x 54.1 cm,
flat hinge
KIV87SFE0**

**The spacious built-in fridge-freezer
combination with VitaFresh XXL keeps
food fresh for longer.**

Performance and consumption

- Energy Class EU19_EEK_D: E
- EU19_Unfrozen volume_D: 200 l
- Net Freezer Volume:
- EU19_Frozen volume_D: 70 l
- Annual Energy Consumption: EU19_Annual energy cons rd_D: 216 kWh/a
- Noise level: EU19_Noise emission_D: 35 dB

Design

- LED interior light in fridge section

Comfort and Safety

- Display: LED electronic temperature control
- Super freeze function with automatic deactivation
- Acoustic open door warning system

Fridge Section

- 5 safety glass shelves, of which 4 are height adjustable
- Bottle rack: Bottle grid

Freshness System

- VitaFresh

Freezer Section

- LowFrost
- 2 transparent freezer drawers, including 1 BigBox

Dimensions



- Dimensions (H x W x D): 177.2 cm x 54.1 cm x 54.8 cm
- Niche Dimension (H x W x D): 177.5 cm x 56.0 cm x 55.0 cm

Technical Information

- Flat hinge
- Door right hinged, reversible hinging

**Series 4, built-in fridge-freezer with
freezer at bottom, 177.2 x 54.1 cm,
flat hinge
KIV87SFE0**

measurements in mm

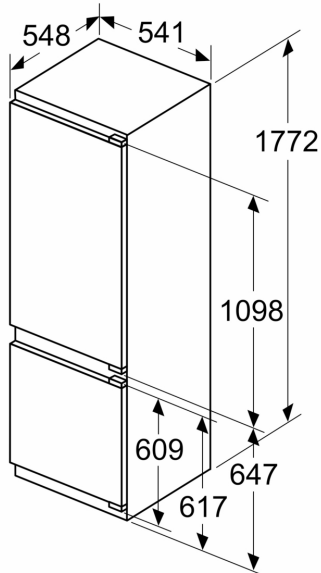

Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

Δ Weight


A: Appliance door height including hinges in mm

B: Undamped hinge, unit front in kg

C: Damped hinge, unit front in kg


D: Additional possible load in kg with heavy load kit


A	B	C	D
1500-1750	22	22	
720-1400	19	19	B+5 / C+5
A1	15	19	
A2	15	19	

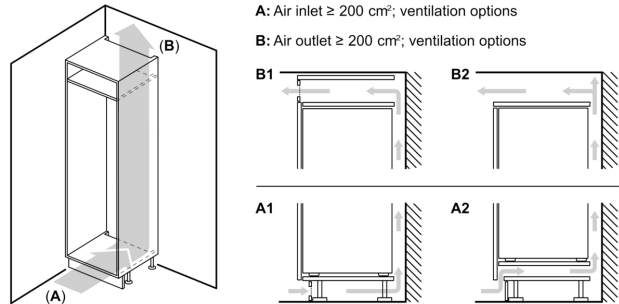

A: Air inlet $\geq 200 \text{ cm}^2$; ventilation options

B: Air outlet $\geq 200 \text{ cm}^2$; ventilation options

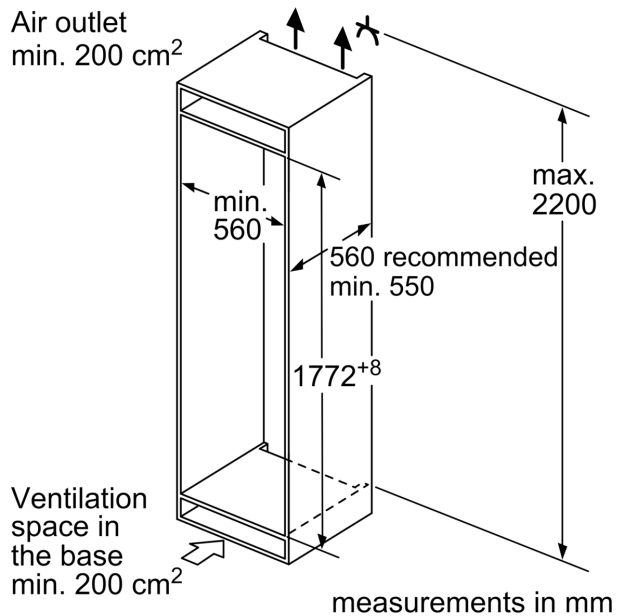


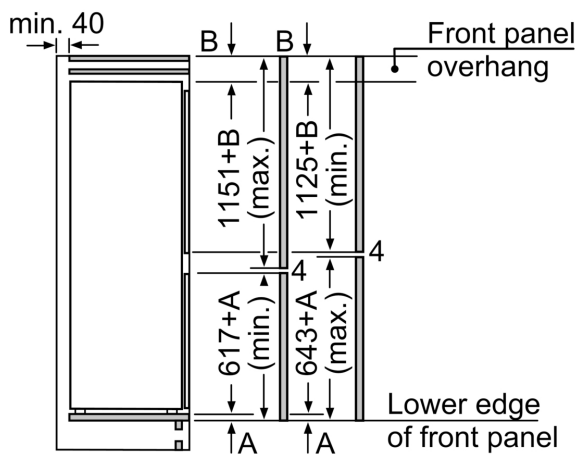

The specified unit door dimensions are valid for a door gap of 4 mm.

measurements in mm

measurements in mm
Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.